

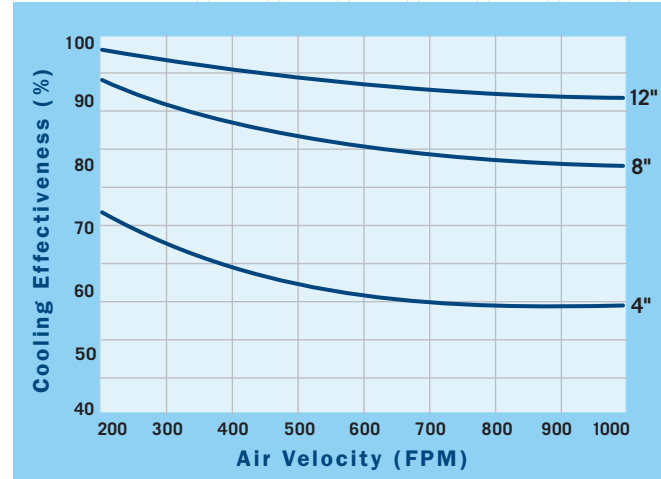
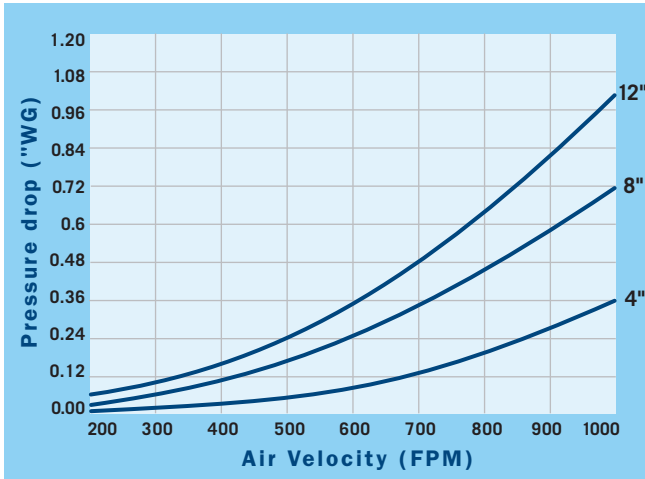


Glas Pad 7060 Performance Curves

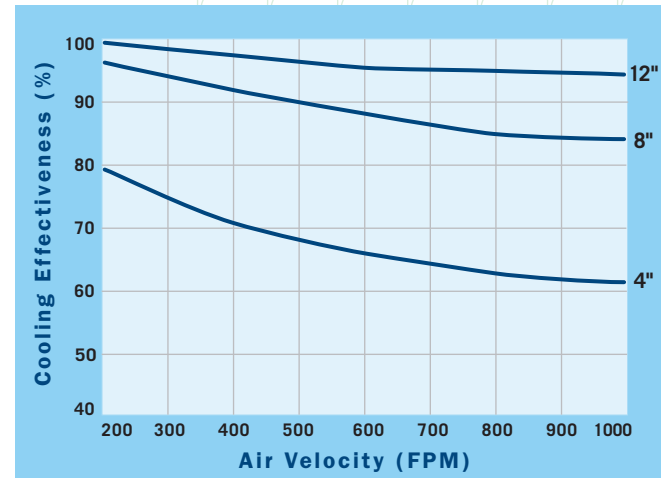

Glas Pad 7090 Performance Curves

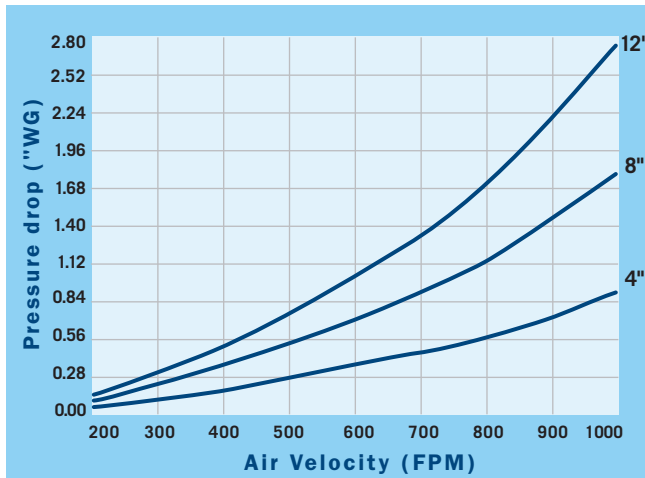



Media Specifications

Cel Pad 7-Series	
Base Sheet	Cellulose
Dry Weight	1.8 lb/ft ³
Wet Weight	3.5 lb/ft ³
Max Water Temp	130°F
Max Air Temp	300°F
PH Range	6-9



Cel Pad 5-Series	
Base Sheet	Cellulose
Dry Weight	2.5 lb/ft ³
Wet Weight	4.9 lb/ft ³
Max Water Temp	130°F
Max Air Temp	300°F
PH Range	6-9

Glas Pad 7-Series	
Base Sheet	Glass Fiber
Dry Weight	2.2 lb/ft ³
Max Water Temp	130°F
Max Air Temp	350°F
Flamability Risk	None
PH Range	6-8
Fire Classification	Class A2, S2, D0 based on EN ISO1182 and EN 13823

Cel Pad 7060 Performance Curves

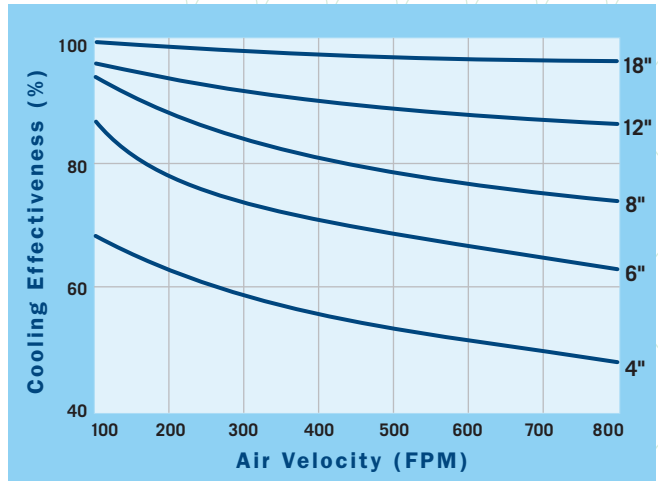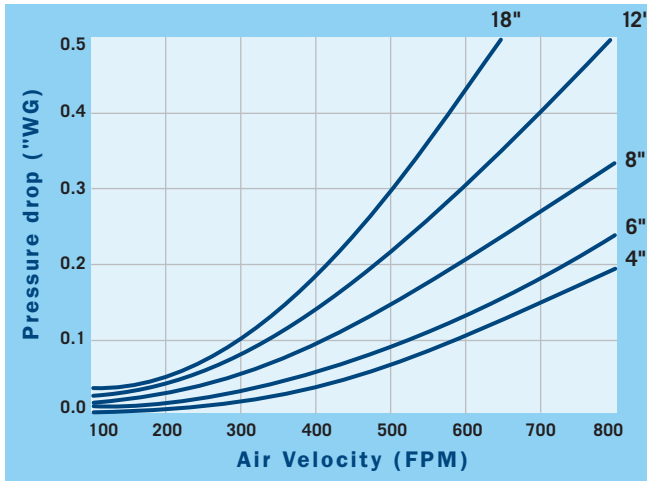

Cel Pad 7090 Performance Curves

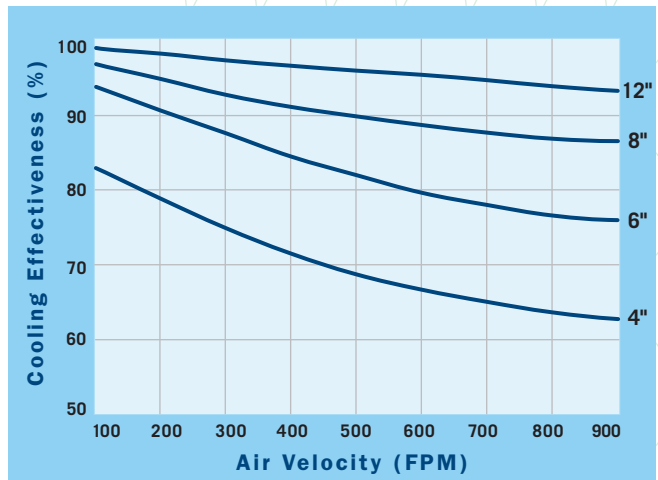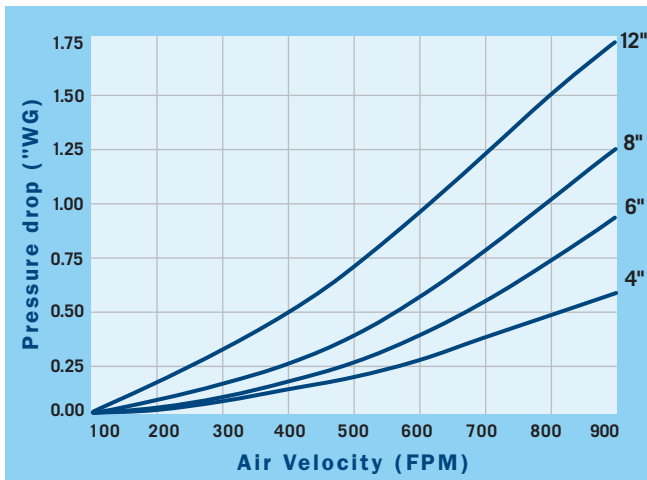

Cel Pad 5090 Performance Curves

